



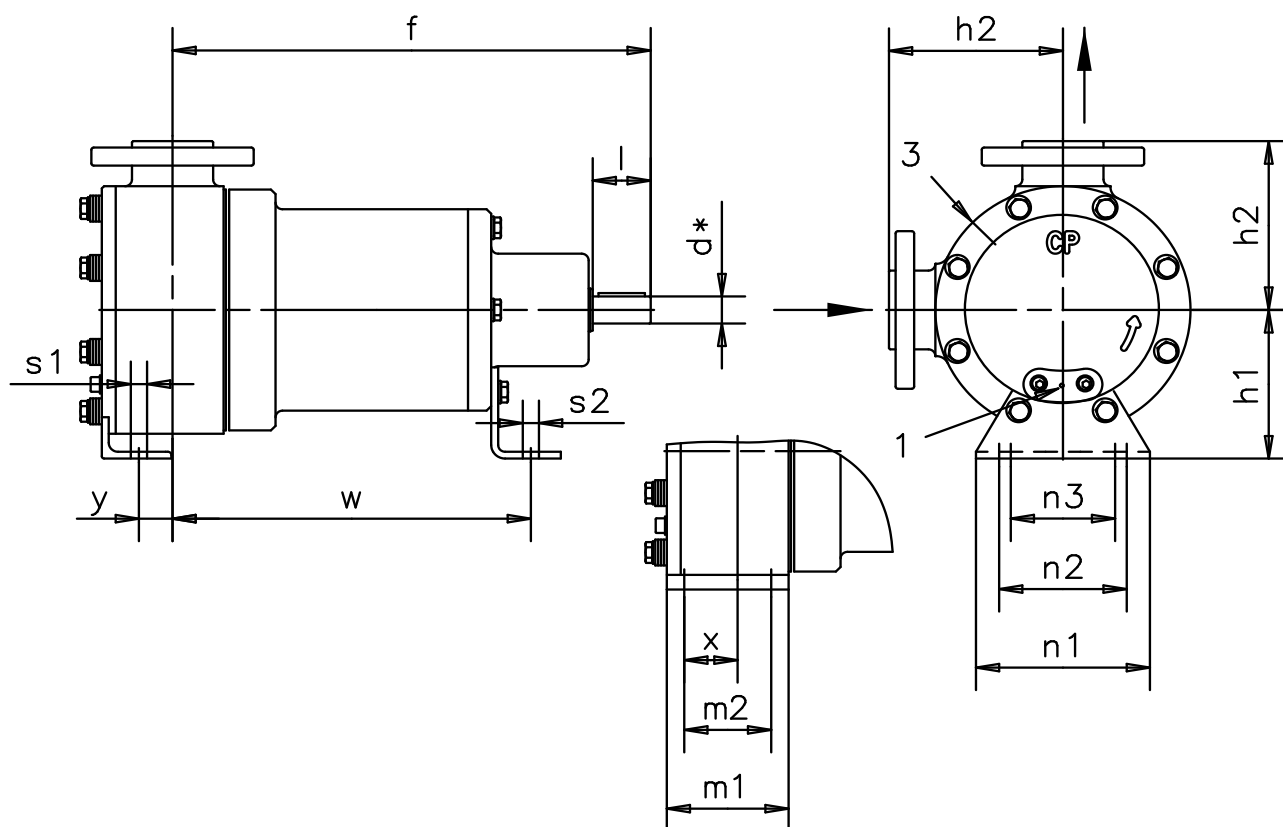

\* PASSFEDER DIN 6885

MASSE IN [mm]

| GRÖSSE | FLANSCH          |    |    |     |      |    | PUMPENMASSE |     |     | FUSSMASSE |    |      |    |     |     |     |     |     |     | WELLE |    |    | GEW.<br><br>[kg] |
|--------|------------------|----|----|-----|------|----|-------------|-----|-----|-----------|----|------|----|-----|-----|-----|-----|-----|-----|-------|----|----|------------------|
|        | ANSCHLUSSMASSE   |    |    |     |      |    | f           | h1  | h2  | m1        | m2 | x    | y  | n1  | n2  | n3  | s1  | s2  | w   | d     | l  |    |                  |
|        | DN               |    |    |     |      |    |             |     |     |           |    |      |    |     |     |     |     |     |     |       |    |    |                  |
|        | EIN AUS k nxØd D |    |    |     |      |    |             |     |     |           |    |      |    |     |     |     |     |     |     |       |    |    |                  |
|        | 25-25-100        | 25 | 25 | 85  | 4x14 | 16 | 319         | 90  | 125 | 75        | 50 | 34,5 | -  | 165 | 140 | 125 | M10 | M10 | 225 | 24    | 50 | 20 |                  |
|        | 25-25-140        | 32 | 32 | 100 | 4x18 | 18 | 412         | 132 | 150 | 70        | -  | -    | 29 | 150 | 110 | 110 | M12 | M12 | 309 | 24    | 50 | 26 |                  |
|        | 25-25-150        | 32 | 32 | 100 | 4x18 | 20 | 364         | 132 | 160 | 100       | 70 | 53.5 | -  | 240 | 190 | 110 | M12 | M12 | 260 | 24    | 50 | 35 |                  |



| POS | GEW  | ANSCHLUSS        |
|-----|------|------------------|
| x 1 | Ø8   | ENTLEERUNG       |
| 3   | M8x1 | TEMPERATUR PT100 |

GÜLTIG NUR MIT VISUM

DATUM

VISUM

KUNDE

BEST.-NR.

POSITION

CP-NR.