


MKTP - for Efficient Tank Unloading

Stainless Steel Magnetic Drive Chemical Process Sump Pump



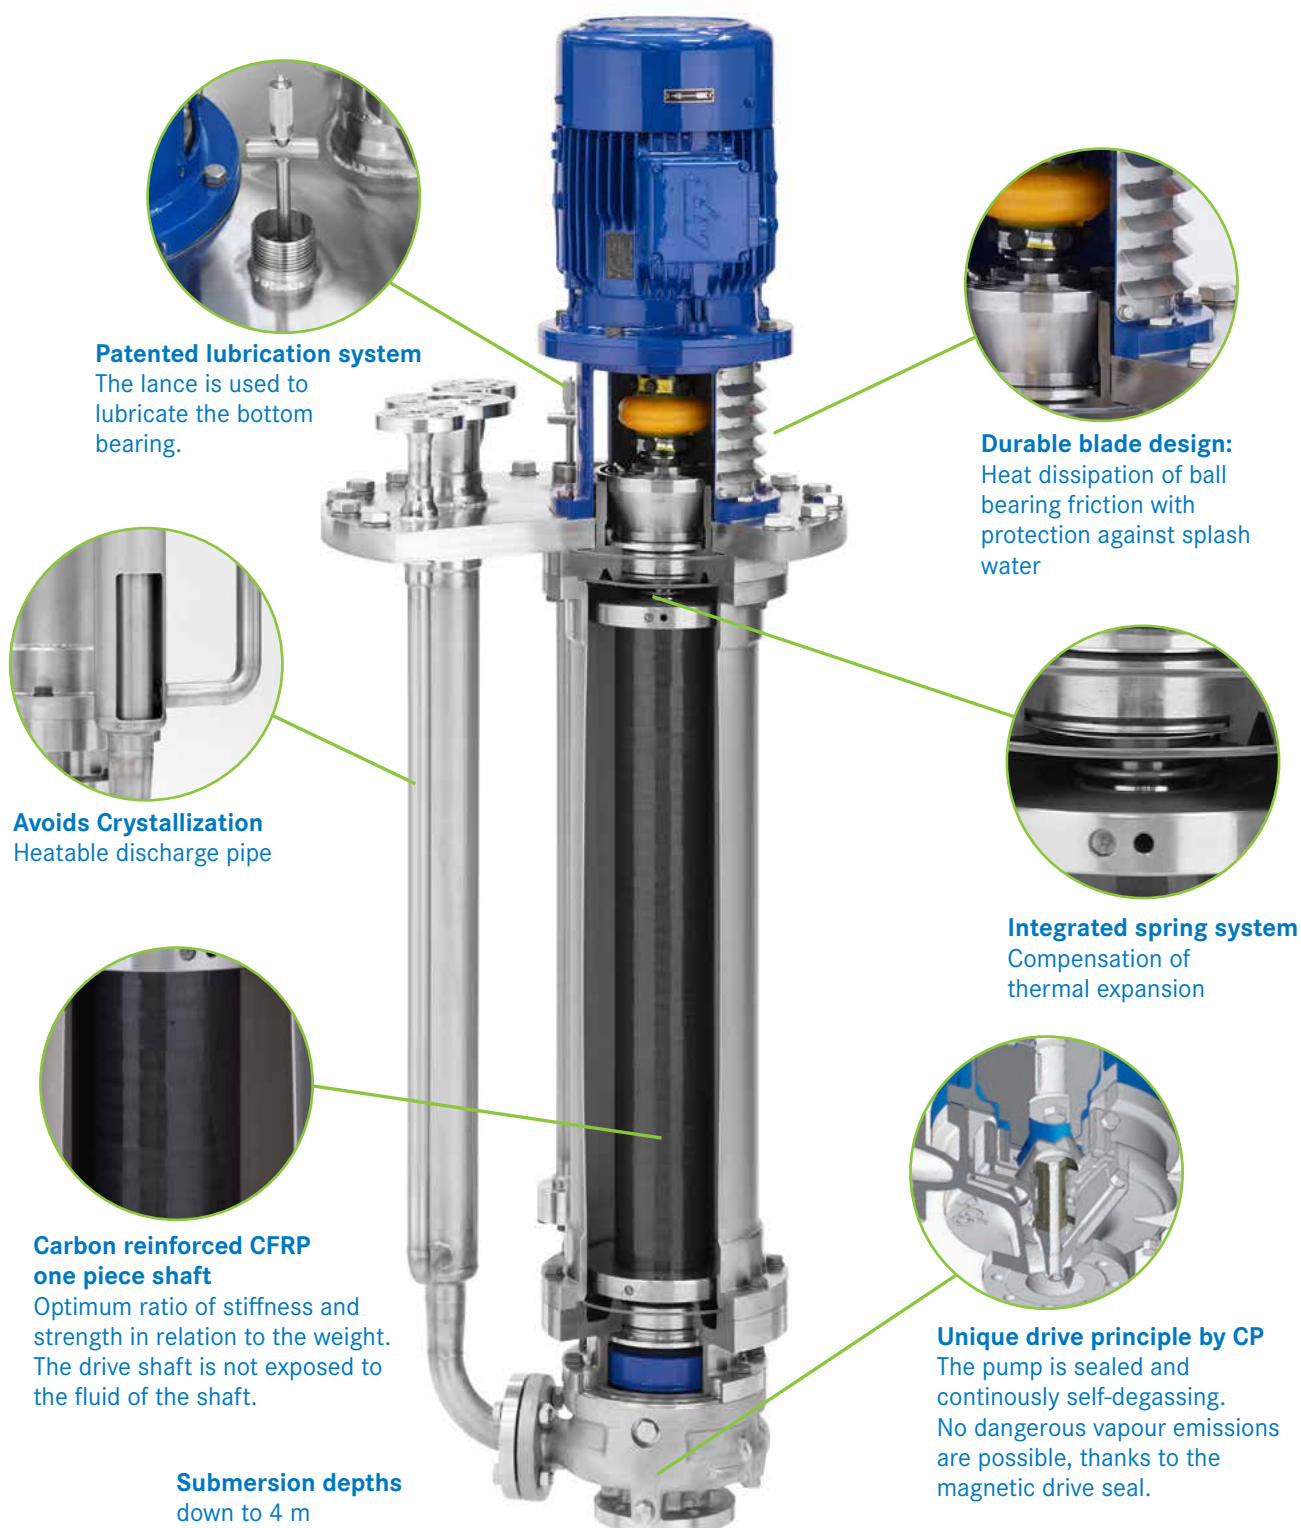

Configurations

Bearing-frame

Mounts

- Vertical submersible pump

Casing materials

- Stainless steel 1.4581 (316)
- Stainless steel (e.g. 1.4306, Uranus® B6)

Pump protection

- Engine load sensor

Technical data

Capacities (min./max.)	0.25 to 250 m³/h
Heads (min./max.)	3 to 100 m
Temperatures (min./max.)	-20 to +175°C
Kinematic viscosities	0.5 to 350 mm²/s
Solids handling	up to 30% solids concentration and 1 mm particle size, depending on the pumped fluid





Directives and standards

EC Machinery Directive

EC ATEX Directive

DIN EN ISO 5199

DIN EN ISO 15783

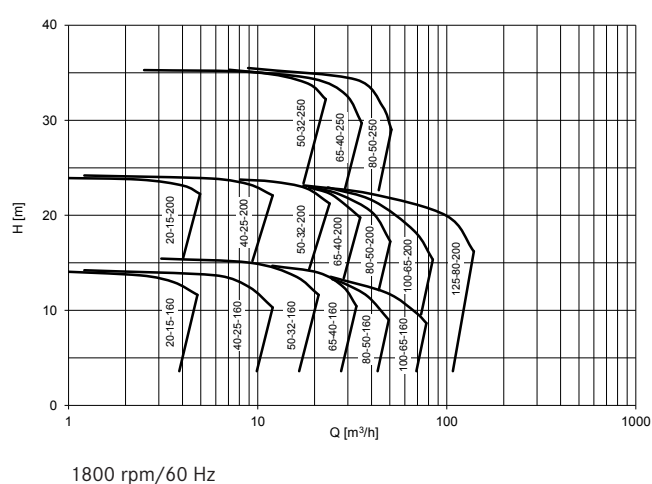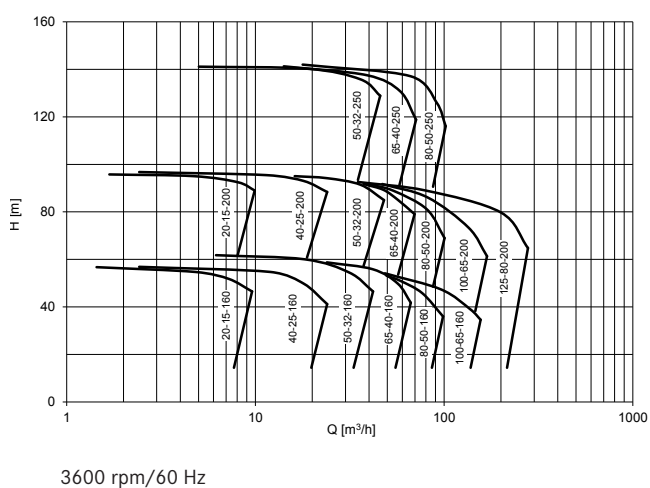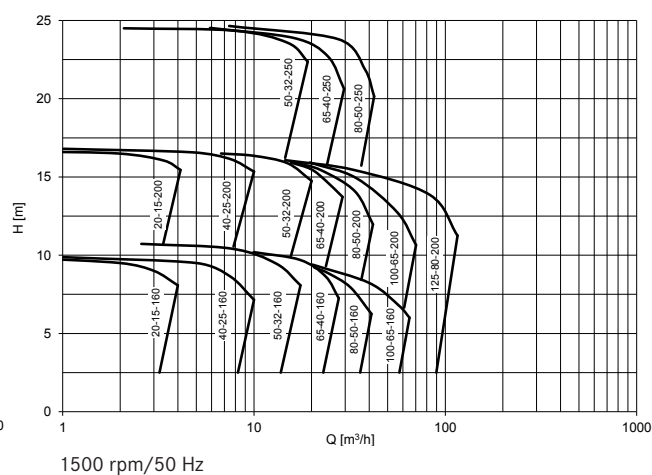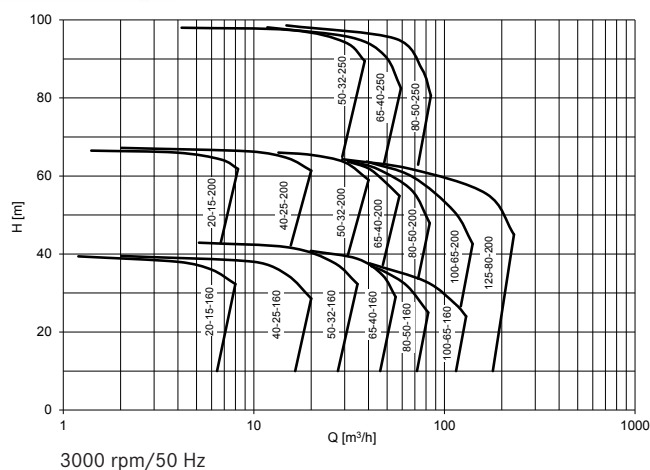

Find your local CP distributor on www.cp-pumps.com
or contact CP directly: +41 62 746 85 85/info@cp-pumps.com



Industries, processes and fluids

Learn more about typical applications

