




MKP

15 G 6 N

MONOBLOC NEMA C-BRIDE

Rev. 5 28.01.15 Rh

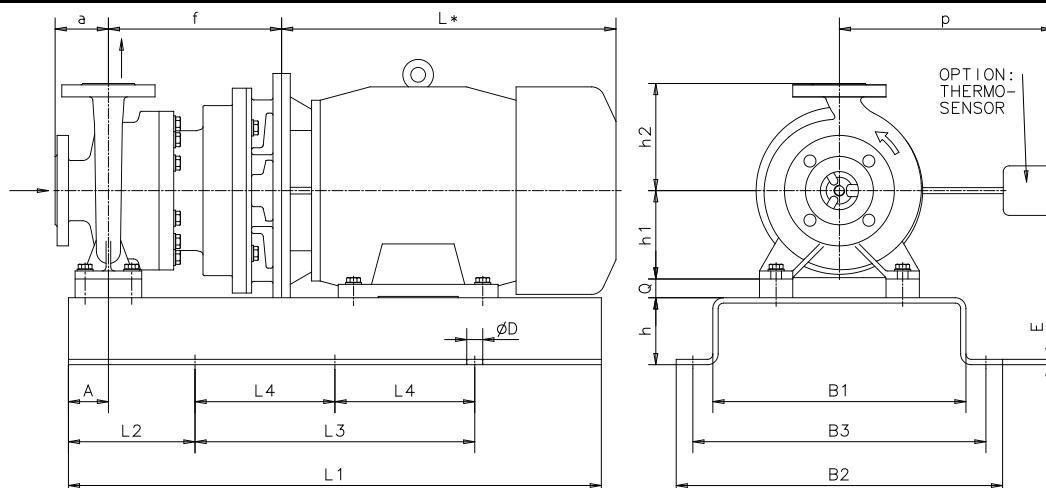

MOTEUR < 213 = MOTEUR AVEC BRIDE; MOTEUR > 184 = MOTEUR AVEC BRIDE ET PIED

L* = DEPENDRE DU MOTEUR

BRIDES EN 1092-1, ANSI-CONNEXIONS RETOUCHÉES

DIMENSIONS EN [mm]

	TYPE		DN		DIM. DE LA POMPE				A	p max	TYPE DU MOTEUR & PLAQUE DE BASE									POIDS
	ASP	REF	a	f	h1	h2	143T	182			213	254	284	324	364	404	444	SANS		
							145T	184			215	256	286	326	365	405	445	MOTEUR		
										ISO NO / Q									[kg]	
	20-15-160	20	15	70	190	132	150	50	320	1.1/0	1.1/0	3.1/0							50	
	20-15-200	20	15	80	275	160	180	50	350	3.1/0	3.1/0	4.2/0	4.3/0	5.1/18					70	
	40-25-160	40	25	65	190	132	160	50	320	1.1/0	1.1/0	3.1/0							51	
	40-25-200	40	25	80	275	160	180	50	350	3.1/0	3.1/0	4.2/0	4.3/0	5.1/18					80	
	50-32-160	50	32	80	270	132	160	60	320	3.1/0	3.1/0	4.2/0	4.3/26	5.1/46	6.1/71				75	
	50-32-200	50	32	80	270	160	180	60	340	3.1/0	4.2/0	4.3/0	5.1/18	6.1/43	7.1/69	8.1/94		105		
	50-32-250	50	32	100	300	180	225	75	370	4.2/0	4.2/0	4.3/0	5.1/0	6.1/23	7.1/49	8.1/74		125		
	65-40-160	65	40	80	270	132	160	60	320	3.1/0	3.1/0	4.2/0	4.3/26	5.1/46	6.1/71				80	
	65-40-200	65	40	100	270	160	180	60	340	3.1/0	4.2/0	4.3/0	5.1/18	6.1/43	7.1/69	8.1/94		105		
	65-40-250	65	40	100	300	180	225	75	370	4.2/0	4.2/0	4.3/0	5.1/0	6.1/23	7.1/49	8.1/74		125		
	80-50-160	80	50	100	270	160	180	60	320	3.1/0	3.1/0	4.2/0	4.3/0	5.1/18	6.1/43				85	
	80-50-200	80	50	100	270	160	200	60	340	3.1/0	4.2/0	4.3/0	5.1/18	6.1/43	7.1/69	8.1/94		110		
	80-50-250	80	50	125	300	180	225	75	370	4.2/0	4.2/0	4.3/0	5.1/0	6.1/23	7.1/49	8.1/74		130		
	80-50-315	80	50	125	330	225	280	75	400	5.1/0	5.1/0	5.1/0	6.1/0	7.1/0	8.2/299.1/55				295	
	100-65-160	100	65	100	270	160	200	75	320	3.1/0	4.2/0	4.3/0	5.1/18	6.1/43	7.1/69				95	
	100-65-200	100	65	100	300	180	225	75	370	4.2/0	4.2/0	4.3/0	5.1/0	6.1/23	7.1/49	8.1/74		145		
	125-80-200	125	80	125	300	180	250	75	370	4.2/0	4.2/0	4.3/0	5.1/0	6.1/23	7.1/49	8.1/74		150		
	125-80-250	125	80	125	330	225	280	90	400	6.1/0	6.1/0	6.1/0	6.1/0	7.1/0	8.2/299.1/55				220	
	125-80-315	125	80	125	470	250	315	90	400	7.1/0	7.1/0	8.2/0	8.2/0	8.2/0	9.1/30				300	
	125-100-200	125	100	125	330	200	280	90	400	5.1/0	5.1/0	5.1/0	6.1/0	7.1/29	8.2/549.1/80				220	
	150-125-315	150	125	140	330	280	355	110	400	8.1/0	8.1/0	8.2/0	8.2/0	8.2/0	9.1/0				310	
	200-150-315	200	150	160	470	315	400	110	440	9.1/0	9.1/0	9.1/0	9.1/0	9.2/0	9.2/0				400	
	250-200-315	250	200	200	475	355	450	145	440	9.1/0	9.1/0	9.1/0	9.1/0	9.2/0	9.2/0				460	

ISO NO	PLAQUE DE BASE										POIDS [kg]
	L1	L2	L3	L4	B1	B2	B3	h	Ø D	E	
1.1	500	90	320	-	240	330	290	60	4x20	8	13
3.1	600	150	300	-	300	390	350	90	4x20	8	22
4.2	800	170	460	-	340	450	400	90	4x24	8	31
4.3	1000	170	460	-	340	450	400	90	4x24	8	40
5.1	950	190	570	-	380	490	440	100	4x24	8	43
6.1	950	205	540	-	430	540	490	120	4x24	8	50
7.1	1000	230	540	-	480	610	550	140	4x28	10	62
8.1	1000	270	460	-	530	660	600	140	4x28	10	66
8.2	1200	250	-	350	530	660	600	140	6x28	10	80
9.1	1300	300	-	350	600	730	670	140	6x28	12	140
9.2	1500	300	-	450	600	730	670	140	6x28	12	170
10.1	1500	330	-	420	730	910	830	160	6x28	12	250

VALIDITE SI SIGNATURE

DATE

SIGNATURE

CLIENT

NO COMMANDE

POSITION

NO DE CP